



**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Quigley, et al


Title: DISCHARGE CHUTE FOR  
CONCRETE

Appl. No.: Unknown

Filing Date: Unknown

Examiner: Unknown

Art Unit: Unknown

CERTIFICATE OF EXPRESS MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Commissioner for Patents, Washington, D.C. 20231.	
EL529678551US (Express Mail Label Number)	11/15/00 (Date of Deposit)
Karen Meier <small>(Printed Name)</small>  <small>(Signature)</small>	



**UTILITY PATENT APPLICATION**  
**TRANSMITTAL**

Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Thomas P. Quigley  
Scott L. Steckling  
Troy R. Scott

Enclosed are:

- ☒ [ X ] Specification, Claim(s), and Abstract (14 pages).
- ☒ [ X ] Informal drawings (8 sheets, Figures 1-12).
- ☒ [ X ] Declaration and Power of Attorney (4 pages).
- ☒ [ X ] Assignment of the invention to Oshkosh Truck Corporation.
- ☒ [ X ] Assignment Recordation Cover Sheet.
- ☒ [ X ] Check in the amount of \$40.00 for Assignment recordation.
- ☐ [ ] Small Entity statement.
- ☒ [ X ] Information Disclosure Statement.
- ☒ [ X ] Form PTO-1449 with copies of 5 listed reference(s).

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$710.00	\$710.00
Total Claims:	23	- 20	= 3	x \$18.00	= \$54.00
Independents:	3	- 3	= 0	x \$80.00	= \$0.00
If any Multiple Dependent Claim(s) present:			+	\$270.00	= \$0.00
				SUBTOTAL:	= \$764.00
[ ] Small Entity Fees Apply (subtract ½ of above):					= \$0.00
				TOTAL FILING FEE:	= \$764.00

[ X ] A check in the amount of \$764.00 to cover the filing fee is enclosed.

[ ] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.

[ X ] The Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date 11-15-00

By James A. Wilke

FOLEY & LARDNER  
Firstar Center  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202-5367  
Telephone: (414) 297-5776  
Facsimile: (414) 297-4900

James A. Wilke  
Attorney for Applicant  
Registration No. 34,279

**U.S. PATENT APPLICATION**  
**for**  
**DISCHARGE CHUTE FOR CONCRETE**

Inventor(s): Thomas Quigley  
Scott Steckling  
Troy Scott

*FOLEY & LARDNER*  
777 East Wisconsin Avenue  
Milwaukee, Wisconsin 53202

Telephone: (414) 271-2400

## DISCHARGE CHUTE FOR CONCRETE

### FIELD OF THE INVENTION

The present invention relates to a discharge chute for concrete transport vehicles. In particular, the present invention relates to a concrete  
5 discharge chute with a removable plastic lining.

### BACKGROUND OF THE INVENTION

Concrete vehicles or trucks are commonly employed in construction to mix, transport and pour concrete. They can be a rear discharge concrete vehicles or a front discharge concrete vehicle. The front discharge concrete vehicle includes  
10 a drum with an outlet generally supported above a cab enclosure of the vehicle to enable concrete to be discharged and poured through a chute extending forward the vehicle. Because the vehicle discharges concrete at its forward end, the vehicle is better able to supply concrete to locations having limited access. Concrete can also be mixed and poured from stationary facilities, typically referred to as a concrete  
15 mixing plants.

Existing concrete chutes used with concrete transport vehicles or with stationary concrete mixing plants, are typically made of steel with and without reinforcing members. Such chutes are heavy and difficult to manipulate. Also, chutes associated with cement trucks and cement plants are subject to a great deal of  
20 wear and tear not only by the impact and abrasion resulting from the movement of the concrete or other fluent materials, but also by the impact of other machinery and equipment. In response to such conditions, chutes have been developed that have a liner attached in the chute to ameliorate the abrasion and impact conditions experienced by the chute during their use. Prior art devices typically will bolt or  
25 otherwise fasten the liner to the chute in order to maintain the liner within the chute throughout the chute's operational positions. Problems continue to exist, however, in that the fasteners wear as the concrete moves over the fasteners, and the fasteners are subject to corrosion and rust either from the chemical composition of the

concrete or from the fluids used to clean the chutes such as water and hydrochloric acid. Other prior art liners have been laminated to the chute in order to avoid the wear and corrosion of hardware described above. However, the laminated liners, experience different thermal expansion characteristics which causes stress and cracks that allows concrete and other fluent materials to attack the chute. Also, laminated liners cannot be easily replaced or repaired and typically a new chute is required. Other prior art chutes composed of materials other than metal and with or without liners have also been used. However, such chutes are not as resilient to the conditions they are exposed to and further cracking and breaking requires replacement of the entire chute.

Thus, there is a need for a light weight but strong extension concrete chute for use with concrete transportation vehicles or cement mix plants. There is further need for an extension concrete chute with a liner that is not fastened to the chute with fasteners nor laminated to the chute. There is an additional need for an extension concrete chute that supports a removable liner that can be easily replaced.

### SUMMARY OF THE INVENTION

There is provided a light weight but strong extension chute for discharging concrete from a concrete transportation vehicle or a cement mix plant. An extension concrete chute comprising a chute assembly including a frame having a first end and a second end, with each end including an arcuate end angle member maintained in a spaced apart relationship by a pair of chute rails attached to each end angle member. The chute assembly also includes a chute skin mounted within the frame and attached to each chute rail and each end angle member, wherein the chute assembly defines a longitudinally elongated concave chute. A removable liner is mounted within the chute assembly adjacent to the chute skin. Each chute rail is provided with a hook mounted on each chute rail proximate the second end of the chute assembly and a bracket assembly mounted on each chute rail proximate the first end of the chute assembly. The chute rails are configured to releasably engage and support the liner. The extension chute can also be provided with an elongated channel attached to each end angle member and to the chute skin underneath the extension chute. The chute rails can also be configured in

conjunction with a liner flange to form a liner pocket to receive the liner and removably retain the liner within the extension chute.

There is also provided a concrete transportation vehicle comprising a chassis having a front end and a rear end with a mixing drum supported by the chassis. The drum has a first end and a second end and an opening in  
 5 communication with a discharge hopper and a main discharge chute. A pedestal extending between the chassis and one end of the drum supports that end of the drum. A cab enclosure is supported by the chassis and provides operating controls for the vehicle. An extension chute is operatively aligned with the main chute for  
 10 purposes of discharging the concrete from the mixing drum. The extension chute comprises a chute assembly including a frame having a first end and a second end with each end including an arcuate end angle member maintained in a spaced apart relationship by a pair of chute rails attached to each angle member. The chute  
 15 assembly also includes a chute skin mounted within the frame and attached to each chute rail and each angle member, wherein the chute assembly defines a longitudinally elongated concave chute. A removable liner is mounted within the chute assembly adjacent to the chute skin.

There is also provided a method for reducing wear of an extension concrete chute with the chute having a chute skin and a pair of chute rails with each  
 20 chute rail having a bracket assembly mounted on one end and a hook mounted on a second end. The method comprises the steps of orientating and aligning a liner having a notch at one end with the first end of each chute rail of the extension concrete chute. Then inserting the liner into a liner pocket formed in each chute  
 25 rail and sliding the liner in the liner pocket until the notch in the liner abuts against the hook on each chute rail. The liner is adjacent to the chute skin when it is inserted into the liner pockets. The liner can be replaced by sliding the liner out of the liner pocket of each chute rail and installing a new liner in accord with the steps heretofore described. A preferred embodiment of the extension chute has the chute  
 30 assembly composed of aluminum and the removable liner composed of plastic.

The features which characterize the invention are pointed out with particularity in the claims annexed hereto and forming a part hereof. However, for a better understanding of the invention, reference should be made to the drawings

which form a part hereof and to the descriptive material, in which there is illustrated and described several exemplary embodiments of the invention.

### BRIEF DESCRIPTION OF THE DRAWINGS

5                Figure 1 is a side plan view of a front discharge concrete vehicle including an exemplary embodiment of a concrete chute having a plastic liner.

              Figure 2 is a front view of a front discharge concrete vehicle including an exemplary embodiment of a concrete chute having a plastic liner.

10             Figure 3 is a side plan view of a rear discharge concrete vehicle including an exemplary embodiment of a concrete chute having a plastic liner.

              Figure 4 is a rear view of a rear discharge concrete vehicle including an exemplary embodiment of a concrete chute having a plastic liner.

              Figure 5 is a perspective view of an exemplary embodiment of a concrete chute supporting a plastic liner.

15             Figure 6 is an exploded perspective view of an exemplary embodiment of a concrete chute and a plastic liner.

              Figure 7 is a top plan view of an exemplary embodiment of a concrete chute removably supporting a plastic liner.

20             Figure 8 is an end view of the concrete chute illustrated in Fig. 7 along the lines 8-8.

              Figure 9 is an end view of the concrete chute illustrated in Fig. 7 along the lines 9-9.

              Figure 10 is a partial interior side view of the concrete chute illustrated in Fig. 7 along the lines 10-10.

25             Figure 11 is a partial interior side view of the concrete chute illustrated in Fig. 7 along the lines 11-11.

              Figure 12 is a sectional view of the concrete chute illustrated in Fig. 7 along the lines 12-12.

30             Figure 13 is an enlarged perspective view of the hook and chute rail engaging the liner.

## DETAILED DESCRIPTION OF THE EXAMPLARY EMBODIMENTS

Figures 1 and 2 are views of a front discharge concrete transport vehicle 10 configured to mix, transport and pour concrete. Vehicle 10 generally includes chassis 12, mixing drum 14, pedestal 16, and cab enclosure 18. Chassis 12 supports mixing drum 14, pedestal 16, cab enclosure 18 and conventionally known engine, transmission and hydraulic systems (not shown) of vehicle 10. Chassis 12 includes frame 22 and wheels 24. Frame 22 extends from a rear end 28 to a front end 30 of vehicle 10 and is coupled to wheels 24. Frame 22 provides a structural base for supporting drum 14, pedestal 16 and chassis 18. Frame 22 includes a widened front portion 34 which extends over and about forward most wheels 24 to simultaneously support cabin enclosure 18 and to serve as a fender for the forward most wheels 24. Frame 22 is preferably formed from heat treated carbon manganese steel.

Wheels 24 moveably support frame 22 above the ground or terrain. As will be appreciated, wheels 24 may be replaced by other ground engaging motive members such as tracks.

Mixing drum 14 is conventionally known and is supported by frame 22 of chassis 12. Drum 14 has a first end 36 towards rear 28 and a second end 38 towards front 30 of vehicle 10. Second end 38 extends above cab enclosure 18 and includes an opening 40 through which concrete is emptied from drum 14 into the discharge hopper 41 and main chute 44 as well as extension chutes 45 (shown connected to the main chute 44), for distribution of concrete forward front 30 of vehicle 10. Drum 14 is rotated in a conventionally known manner to mix concrete until being emptied through opening 40 into discharge hopper 41 and chute 44. Because opening 40, discharge hopper 41 and chute 44 extend above cab enclosure 18 and forward front end 30 of vehicle 10, concrete vehicle 10 is better able to supply concrete to hard to reach and otherwise inaccessible locations.

Pedestal 16, also known as a support post or support column, comprises part of the super structure of vehicle 10 and extends between frame 22 of chassis 12 and end 38 of drum 14. Pedestal 16 supports end 38 of drum 14 above cab enclosure 18.



Cab enclosure 18 includes housing 46 supported by frame 22 of chassis 12 below end 38 of drum 14.

Figures 3 and 4 are views of a rear discharge concrete transport vehicle 50 configured to mix, transport and pour concrete. Vehicle 50 generally includes chassis 52, mixing drum 54, pedestal 56, and cab enclosure 58. Chassis 52 supports mixing drum 54, pedestal 56, cab enclosure 58 and conventionally known engine, transmission and hydraulic systems (not shown) of vehicle 50. Chassis 52 includes frame 62 and wheels 24. Frame 62 extends from a rear end 68 to a front end 70 of vehicle 50 and is coupled to wheels 24. Frame 62 provides a structural base for supporting drum 54, pedestal 56 and chassis 58. Frame 62 is preferably formed from heat treated carbon manganese steel.

Wheels 24 moveably support frame 62 above the ground or terrain. As will be appreciated, wheels 24 may be replaced by other ground engaging motive members such as tracks.

Mixing drum 54 is conventionally known and is supported by frame 62 of chassis 52. Drum 54 has a first end 64 towards rear 68 and a second end 66 towards front 70 of vehicle 50. Second end 66 includes an opening 40 through which concrete is emptied from drum 54 into spout 42 and main chute 44 as well as extension chutes 45 (shown connected to the main chute 44), for distribution of concrete to rear 70 of vehicle 50. Drum 54 is rotated in a conventionally known manner to mix concrete until being emptied through opening 40 into discharge hopper 41 and chute 44.

Pedestal 56, also known as a support post or support column, comprises part of the super structure of vehicle 50 and extends between frame 62 of chassis 52 and end 64 of drum 54. Pedestal 56 supports end 64 of drum 54.

Cab enclosure 58 includes housing 59 supported by frame 62 of chassis 52 in front of end 66 of drum 54.

Figures 5-13 illustrate exemplary embodiments of an extension chute 45 that supports a removable liner 94. Extension chutes typically are attached to a main chute 44 of a concrete delivery system. The delivery system can be of the type of vehicles described above or it can be at a stationary concrete mixing plant. More than one extension chute can be sequentially mounted to extend the delivery

chute for placement of the wet concrete as it leaves the mixing drum of a concrete delivery system.

An extension chute 45 is operatively aligned with the main chute 44 with the extension chute 45 comprising a chute assembly 80 which includes a frame having a first end 81 and a second end 82, with each end including an arcuate end angle member 90 which are maintained in a spaced apart relationship by a pair of chute rails 86 attached to each end angle member 90. Mounted inside the frame to form a longitudinally elongated concave chute is a chute skin 84 which is attached to each chute rail 86 and each end angle member 90. The chute skin can be mounted to the frame in any convenient manner such as welding. The chute skin 84 is aligned with each chute rail 86 along its entire longitudinal length. The attachment method however, may be at selected intervals along such length as is appropriate for the type of materials composing the chute skin 84 and the chute rails 86 and the end angle members 90. The extension chute 45 also includes a removable liner 94 mounted within the chute assembly 80 adjacent to the chute skin 84.

One embodiment of the extension chute 45 includes a hook 99 mounted on each chute rail 86 proximate the second end 82 of the chute assembly 80 and a bracket assembly 95 mounted on each chute rail 86 proximate the first end 81 of the chute assembly 80. The bracket assembly 95 includes a first side portion 96 and a second side portion 97 with each side portion supporting an attachment pin 98. In operation, a hook 99 on the downstream end of the chute engages the attachment pin 98 to secure an extension chute 45 to the prior chute member. In this manner, any number of extension chutes 45 can be mounted to each other as is deemed necessary by an operator of the cement delivery system. In the typical arrangement, three or four extension chutes are utilized at any given time. Additional extension chutes can be stored on the vehicle 10 as shown in Fig. 1.

In order to provide a lighter extension chute 45 and a more manageable extension chute 45 when used for the delivery of concrete, the chute assembly 80 is composed of aluminum. Each chute rail 86, each end angle member 90 and the chute skin 84 are composed of aluminum. For additional strength, one embodiment of the extension chute 45 includes an elongated channel 92 attached to

each end angle member 90 and to the chute skin 84. This dorsal channel 92 is mounted underneath the extension chute 45 and provides bending moment strength as well as tortional force resistance. The dorsal channel 92 is also composed of aluminum. Applicants contemplate that the chute assembly 80 which includes the frame comprising the end angle members 90 and the chute rails 86, the dorsal channel 92 and the chute skin 84 can also be composed of an engineered plastic with appropriate strength and reinforcement to support the weight of fluid concrete.

The removable liner 94 is mounted within the chute assembly 80 adjacent to the chute skin 84. The chute rails 86 are each configured, in conjunction with a liner flange 88, to form a liner pocket 89 to receive the liner 94 and removably retain the liner 94 within the chute assembly 80 of the extension chute 45. Another embodiment of the extension chute 45 provides that each chute rail 86 and liner flange 88 are composed of the same material and form a single, integral member. (See Fig. 12) It is also contemplated that the liner pocket 89 is not continuous along the entire length of the chute rail 86 but rather forms a plurality of liner pockets 89 in a spaced apart relationship along the length of the chute rail 86. In any case, the liner pocket 89 releasably engages the removable liner 94 and provides for it to be slid along the length of the chute rail 86. The removable liner 94, preferably composed of plastic such as polyethylene and particularly ultra-high molecular weight polyethylene with an ultra-violet light inhibitor, is a flat, trapezoidal shaped sheet having a uniform cross section. A preferred embodiment of the removable plastic liner has a substantially uniform thickness of approximately one-eighth (1/8) inch. As seen in Figure 6, the liner 94 must be bent in a u-shaped aspect along its longitudinal length. The liner 94 is orientated and aligned with each liner pocket 89 and inserted into the liner pocket 89 formed in each chute rail 86. The liner 94 is in the liner pocket until a notch 93 abuts against the hook 99 on each chute rail 86. The resiliency of the removable liner 94 in the bent u-shape biases the liner edges inside the chute pockets 89 and assists in retaining the removable liner 94 in the chute assembly 80. The liner 94 abutting against the hook 99 at the notch 93 prevents the liner 94 from sliding forward or downstream when the extension chute 45 is at an angle. Applicants have

found that over time, the removable liner 94 will take on a semi-permanent u-shape as a result of being inserted inside the chute assembly 80 of the extension chute 45.

After a period of time of use of the extension chute 45, the removable liner 94 can be replaced by sliding the liner 94 out of the liner pocket 89 in each chute rail 86 and installing a new liner 94 into the liner pocket 89 of each chute rail 86 as previously described. Removal and replacement of the liner 94 can take place as a result of normal wear and tear on the liner, damage to the liner, or to facilitate the cleaning of the chute assembly 80 and the liner 94 with a liquid wash.

It should be appreciated that there has been provided a discharge chute for concrete that is lightweight but strong for use with concrete transportation vehicles or cement mix plants. It should also be understood that there is provided an extension chute for concrete with a removable liner that can be easily replaced. Although the extension chute has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. The extension chute used for concrete is described with reference to the preferred embodiments and set forth in the following claims as manifestly intended to be as broad as possible.

**WHAT IS CLAIMED IS:**

- 1           1.     A concrete transport vehicle comprising:
  - 2                     a chassis having a front end and a rear end;
  - 3                     a mixing drum supported by the chassis, the drum having a first end
  - 4     and a second end and an opening in communication with a discharge hopper and a
  - 5     main chute;
  - 6                     a pedestal extending between the chassis and one end of the drum to
  - 7     support that end of the drum,
  - 8                     a cab enclosure supported by the chassis and,
  - 9                     an extension chute operatively aligned with the main chute, with the
  - 10    extension chute comprising:
    - 11                     a chute assembly including:
      - 12                         a frame having a first end and a second end, with each end
      - 13                         including an arcuate end angle member maintained in a spaced apart relationship by
      - 14                         a pair of chute rails attached to each end angle member, and
      - 15                         a chute skin mounted within the frame and attached to each
      - 16                         chute rail and each end angle member, wherein the chute assembly defines a
      - 17                         longitudinally elongated concave chute; and
      - 18                         a removable liner mounted within the chute assembly adjacent to the
      - 19                         chute skin.
- 1           2.     The vehicle of claim 1, wherein the mixing drum is configured to
  - 2     discharge concrete from one of the first end and the second end.
- 1           3.     The vehicle of claim 1, including a hook mounted on each chute rail
  - 2     proximate the second end of the chute assembly and a bracket assembly mounted on
  - 3     each chute rail proximate the first end of the chute assembly.
- 1           4.     The vehicle of claim 3 wherein the chute rails mounted on the chute
  - 2     are configured to releasably engage and support the liner.
- 1           5.     The vehicle of claim 4, wherein the liner is composed of plastic.


- 1           6.     The vehicle of claim 4, wherein the frame and chute skin are  
2     composed of aluminum.
- 1           7.     The vehicle of claim 6, including an elongated channel attached to  
2     each end angle member and to the chute skin.
- 1           8.     The vehicle of claim 7, wherein the elongated channel is composed  
2     of aluminum.
- 1           9.     The vehicle of claim 4, wherein the chute rails are each configured,  
2     in conjunction with a liner flange, to form a liner pocket to receive the liner and  
3     removably retain the liner within the extension chute.
- 1           10.    The vehicle of claim 9, wherein the chute rail and the liner flange are  
2     composed of the same material and forms a single, integral member.
- 1           11.    An extension concrete chute comprising:  
2                a chute assembly including:  
3                   a frame having a first end and a second end, with each end  
4     including an arcuate end angle member maintained in a spaced apart relationship by  
5     a pair of chute rails attached to each end angle member, and  
6                   a chute skin mounted within the frame and attached to each  
7     chute rail and each end angle member, wherein the chute assembly defines a  
8     longitudinally elongated concave chute; and  
9                a removable liner mounted within the chute assembly adjacent to the  
10    chute skin.
- 1           12.    The chute of claim 11, including a hook mounted on each chute rail  
2     proximate the second end of the chute assembly and a bracket assembly mounted on  
3     each chute rail proximate the first end of the chute assembly.
- 1           13.    The chute of claim 11 wherein the chute rails mounted on the chute  
2     are configured to releasably engage and support the liner.
- 1           14.    The chute of claim 13, wherein the liner is composed of plastic.

- 1           15.    The chute of claim 13, wherein the frame and chute skin are  
2    composed of aluminum.
- 3           16.    The chute of claim 15, including an elongated channel attached to  
4    each end angle member and to the chute skin.
- 1           17.    The chute of claim 16, wherein the elongated channel is composed of  
2    aluminum.
- 1           18.    The chute of claim 13, wherein the chute rails are each configured,  
2    in conjunction with a liner flange, to form a liner pocket to receive the liner and  
3    removably retain the liner within the extension chute.
- 1           19.    The chute of claim 18, wherein the chute rail and the liner flange are  
2    composed of the same material and form a single, integral member.
- 1           20.    A method for reducing wear of an extension concrete chute with the  
2    chute having a chute skin and a pair of chute rails with each chute rail having a  
3    bracket assembly mounted on one end and a hook mounted on a second end, the  
4    method comprising the steps of:  
5                orientating and aligning a liner having a notch at one end with the  
6    first end of each chute rail;  
7                inserting the liner into a liner pocket formed in each chute rail; and  
8                sliding the liner in the liner pocket until the notch in the liner abuts  
9    against the hook on each chute rail and the liner is adjacent to the chute skin.
- 1           21.    The method of claim 20, including the steps of:  
2                sliding the liner out of the liner pocket in each chute rail; and  
3                installing a new liner in accord with the three steps of claim 20.
- 1           22.    The method of claim 20, wherein the chute is aluminum.
- 1           23.    The method of claim 22, wherein the liner is plastic.

# ABSTRACT

A light weight but strong extension chute for discharging concrete from a concrete transportation vehicle or a cement mix plant. An extension concrete chute comprising a chute assembly including a frame having a first end and a second end, with each end including an arcuate end angle member maintained in a spaced apart relationship by a pair of chute rails attached to each end angle member. The chute assembly also includes a chute skin mounted within the frame and attached to each chute rail and each end angle member, wherein the chute assembly defines a longitudinally elongated concave chute. A removable aligner is mounted within the chute assembly adjacent to the chute skin. Each chute rail is provided with a hook mounted on each chute rail proximate the second end of the chute assembly and a bracket assembly mounted on each chute rail proximate the first end of the chute assembly. The chute rails are configured to releaseably engage and support the liner. The extension chute can also be provided with an elongated channel attached to each end angle member and to the chute skin underneath the extension chute. The chute rails can also be configured in conjunction with a liner flange to form a liner pocket to receive the liner and removably retain the liner within the extension chute.



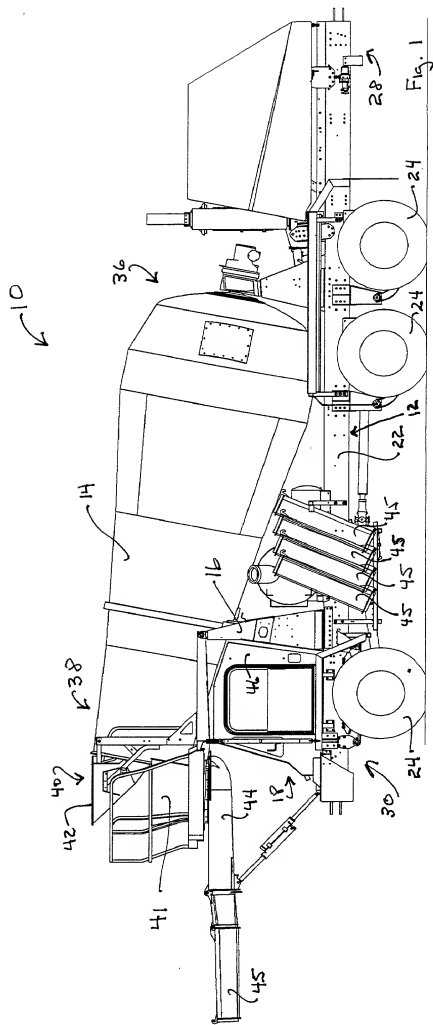

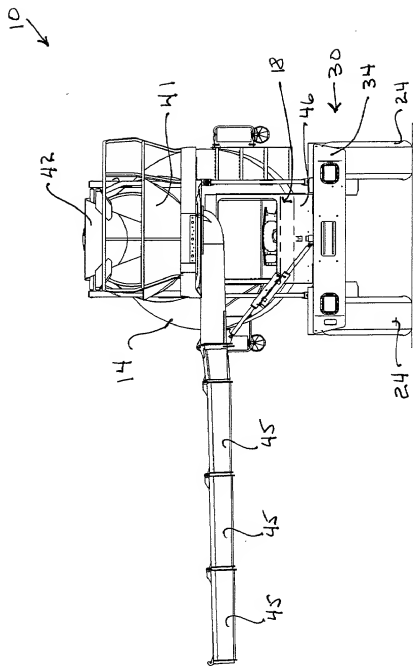


FIG. 2

505

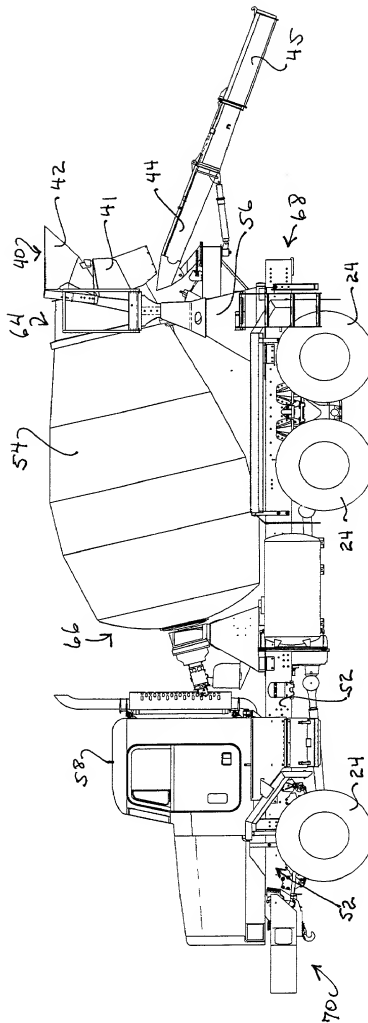


Fig. 3







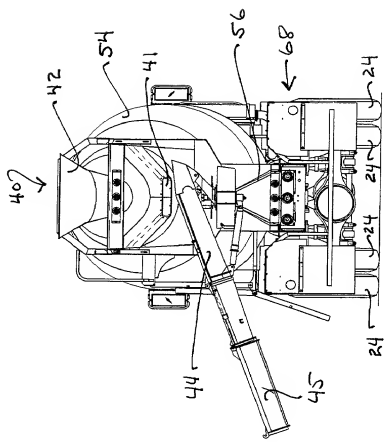


Fig. 4

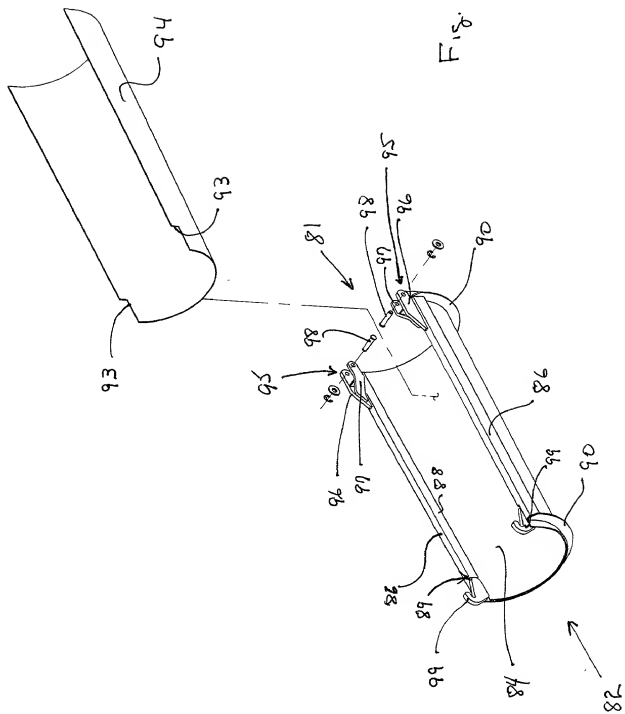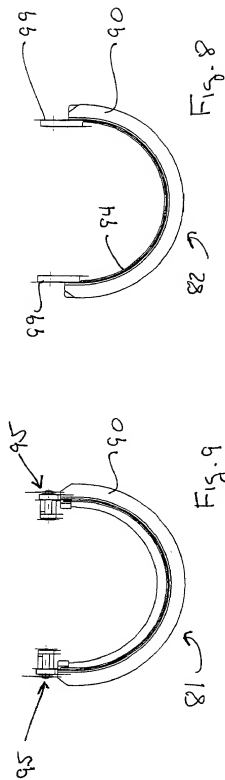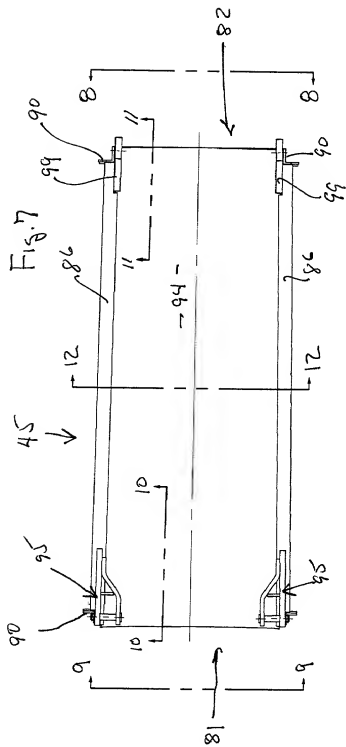

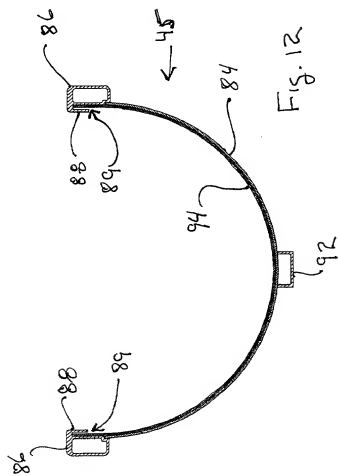

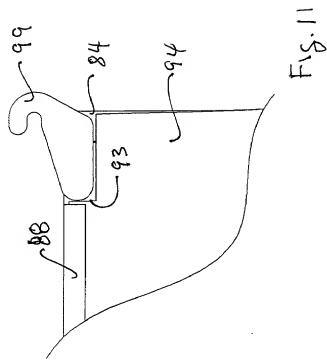

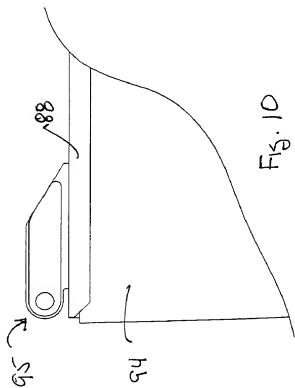



**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

---

**DISCHARGE CHUTE FOR CONCRETE**

---

(Attorney Docket No. 61300/221)

---

the specification of which (check one)

  X   is attached hereto.

       was filed on        as United States Application Number or PCT International Application Number        and was amended on        (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER:

SCOTT D. ANDERSON	Reg. No. 46,521
RUSSELL J. BARRON	Reg. No. 29,512
DAVID J. BATES	Reg. No. 39,902
STEVEN C. BECKER	Reg. No. 42,308
DOUGLAS A. BOEHM	Reg. No. 32,014
EDWARD W. BROWN	Reg. No. 22,022
CHARLES G. CARTER	Reg. No. 35,093
ALISTAIR K. CHAN	Reg. No. 44,603
JOHN C. COOPER III	Reg. No. 26,416

JEFFREY N. COSTAKOS	Reg. No.	34,144
WILLIAM J. DICK	Reg. No.	22,205
BARRY L. GROSSMAN	Reg. No.	30,844
PAUL S. HUNTER	Reg. No.	44,787
KATHERINE D. LEE	Reg. No.	44,865
KEITH D. LINDENBAUM	Reg. No.	40,365
DAVID G. LUETTGEN	Reg. No.	39,282
RICHARD J. MC KENNA	Reg. No.	35,610
JAMES G. MORROW	Reg. No.	32,505
RICHARD B. O'PLANICK	Reg. No.	29,096
TODD A. RATHE	Reg. No.	38,276
MICHAEL D. RECHTIN	Reg. No.	30,128
CHRISTOPHER M. TUROSKI	Reg. No.	44,456
JAMES A. WILKE	Reg. No.	34,279
JOSEPH N. ZIEBERT	Reg. No.	35,421
WALTER E. ZIMMERMAN	Reg. No.	40,883

to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith.

I request that all correspondence be directed to:


James A. Wilke  
 FOLEY & LARDNER  
 Firstar Center  
 777 East Wisconsin Avenue  
 Milwaukee, Wisconsin 53202-5367


Telephone: (414) 297-5776  
 Facsimile: (414) 297-4900

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Thomas P. Quigley
Residence	Oshkosh, WI
Citizenship	USA
Post Office Address	1706 River Mill Road, Oshkosh, WI 54901
Inventor's signature	<i>Thomas P. Quigley</i>
Date	11-10-00

Name of second inventor      Scott L. Steckling  
Residence      Appleton, WI  
Citizenship      USA  
Post Office Address      1611 N. Blossom Dr., Appleton, WI 54914  
Inventor's signature        
Date      11-10-00

Name of third inventor      Troy R. Scott  
Residence      Van Dyne, WI  
Citizenship      USA  
Post Office Address      W7404 Townline Circle, Van Dyne, WI 54979  
Inventor's signature        
Date      11-10-00